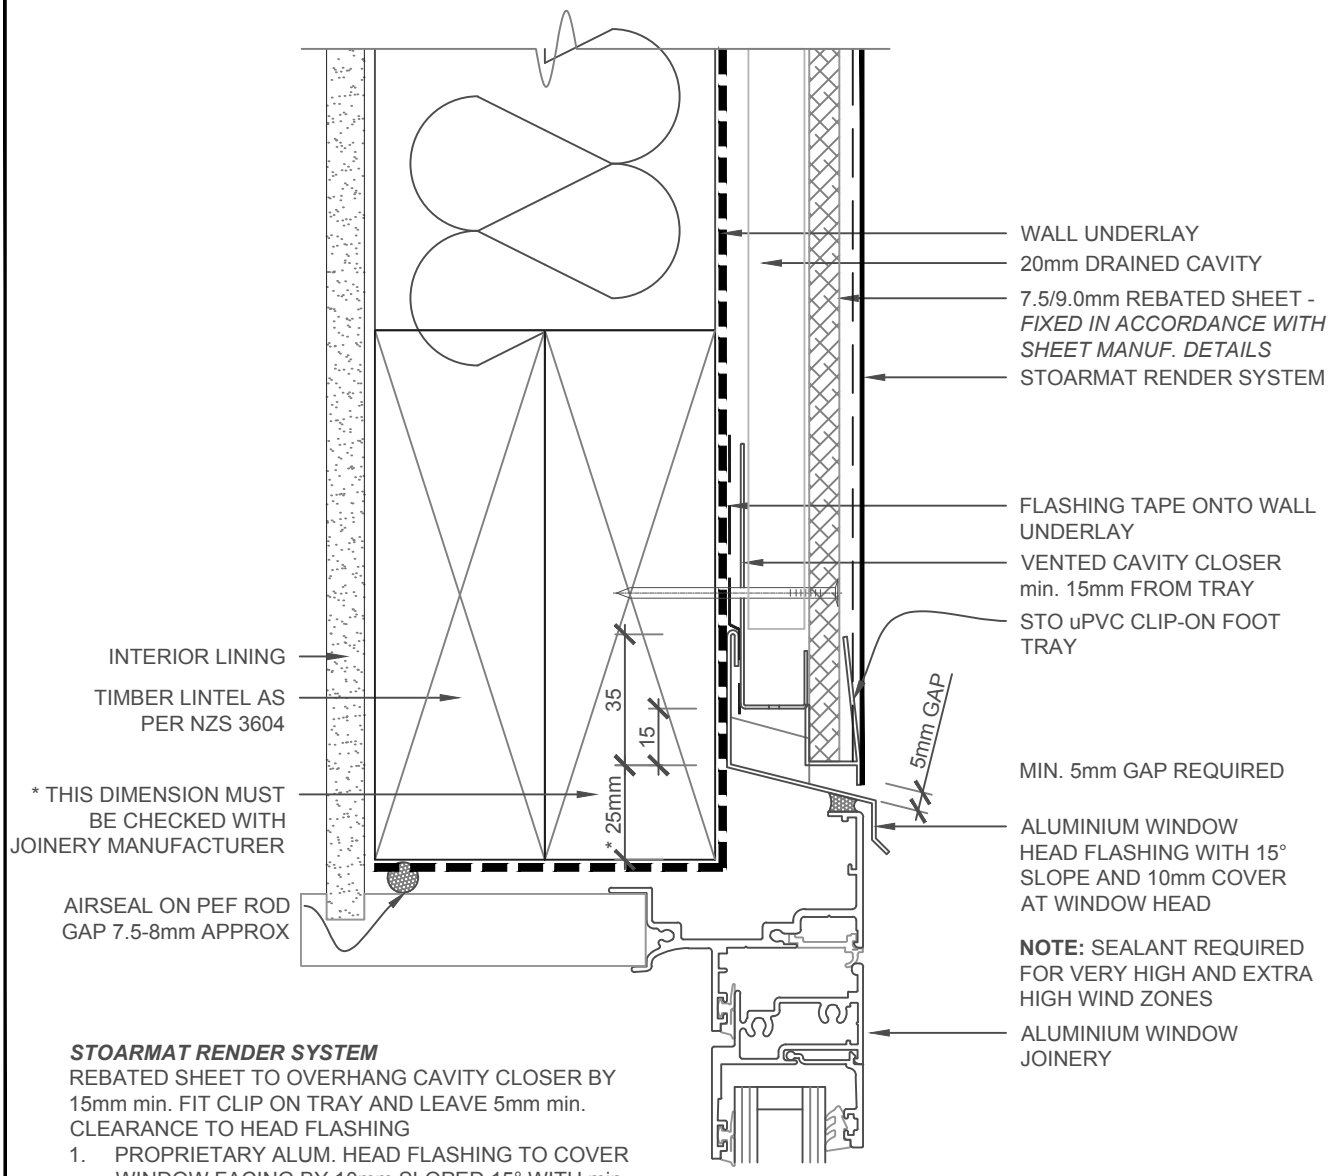

STOARMAT RENDER SYSTEM
REBATED SHEET TO OVERHANG CAVITY CLOSER BY 15mm min. FIT CLIP ON TRAY AND LEAVE 5mm min. CLEARANCE TO HEAD FLASHING

1. PROPRIETARY ALUM. HEAD FLASHING TO COVER WINDOW FACING BY 10mm SLOPED 15° WITH min. 35mm UPSTAND TAPED TO WALL UNDERLAY. ALLOW HEAD FLASHING TO PASS JAMBS BY 20mm AND FIT STOP ENDS IN CAVITY. FLASHING TAPE SYSTEM TO BE INSTALLED AROUND JOINERY OPENINGS AS PER E2/AS1 BY BUILDER.
2. IN EXTRA HIGH WIND ZONES INCREASE FLASHING COVER TO 60mm MIN. AND USE A RIGID UNDERLAY

SCALE 1:2

STO/ MONOTEK	**STOARMAT RENDER SYSTEM**	**FCS 400**
	ALUMINIUM JOINERY - HEAD DETAIL	**2017**

The information contained on this page is based on our experience and research at the date of issue. The detail is for use by Registered Architects, Licensed Designers or Chartered Engineers to assist in developing project details using Sto Systems. Stoanz Ltd reserve the right to alter or update information at any time without prior notice and it is the responsibility of the designer, project manager or Sto contractor to insure they have and use the current Sto details and specifications on site.