


NOTE:
 SUITABLE FOR RECTANGULAR PENETRATIONS UP TO 1200mm WIDE.
 ROOF PITCH MUST BE 10° or HIGHER - REFER TO E2/AS3 TABLE 9 or 17 FOR MAX. ROOF LENGTH ABOVE PENETRATIONS. BLOCKING REQUIRED FOR PENETRATIONS OVER 200mm

FRAMED CHIMNEY
 SCALE 1:20

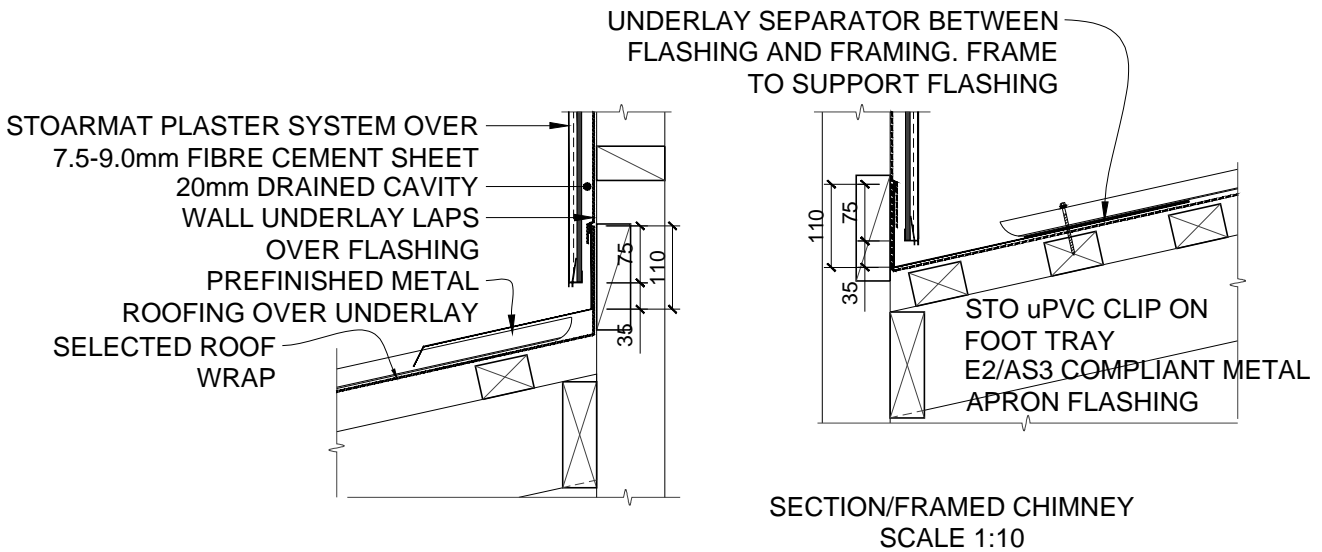

SECTION/FRAMED CHIMNEY
 SCALE 1:10

| | | |
|-------------------------|---|-----------------|
| STO/ MONOTEK | STOARMAT CONSTRUCTION SYSTEM | MFCS 710 |
| | FRAMED CHIMNEY OR PENETRATION UP TO 1200mm | 2014 |

The information contained in this detail is based on our experience and testing and represents the latest information available at the date of issue. This detail is intended for use by the design professional and users of Sto products to assist in developing specific project details to be used in conjunction with a Sto Specification. We reserve the right to alter or update information at any time without prior notice & it is the responsibility of the specifier and/or the project manager to insure that they have the current Sto details and specifications.