


STEEL FRAME CONSTRUCTION MUST BE SPECIFIC DESIGN MEETING REQUIREMENTS OF NZBC.
 FOR STEEL FRAMED BUILDINGS SITUATED IN NZS 3604 WIND ZONES UP TO VERY HIGH STUDS ARE AT 600mm MAX.CTRS. FOR ALL OTHER DWELLINGS STUDS ARE AT 400mm MAX.CTRS, DWANGS ARE REQUIRED AT 800mm CTRS
 PROVIDE THERMAL BREAK TO ALL STEEL MEMBERS **OR** BRANZ APPRAISED PROPRIETARY RIGID AIR BARRIER/THERMAL BREAK

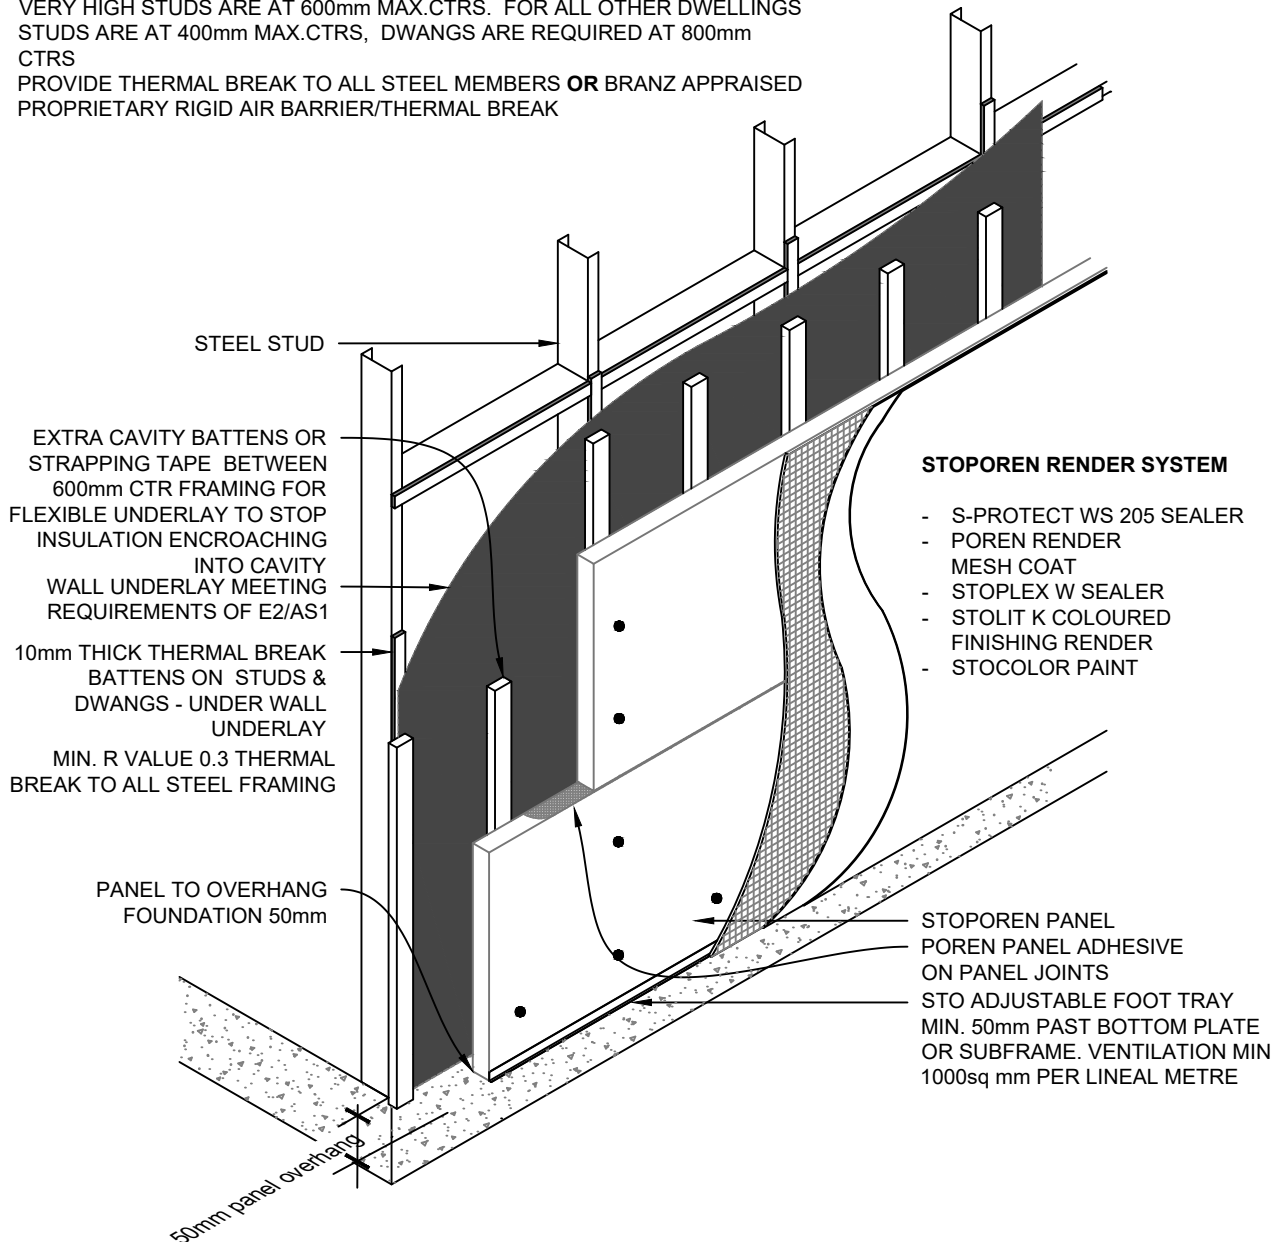

NOTE: 600mm FRAMING
 FIXINGS AT 300mm CENTRES ON FRAMING 150mm FROM PANEL EDGE WITH ONE FIXING BETWEEN STUDS ON THE BOTTOM PLATE OVER FRAMING @ 600mm CTRS max.
 REFER TO FOUNDATION DETAILS FOR SPECIFIC FIXING LAYOUT

SCALE 1:20

STOPOREN FACADE	STOPOREN FACADE SYSTEM	PP 102
	CAVITY BATTEN SETOUT STEEL FRAME/THERMAL BREAK (600CTRS)	2020